

# INSTALLATION INSTRUCTIONS


Correct installation of the pennant anti-tangle device reduces the risk of the pennant twisting and wrapping around the flagpole.

Lay the pennant on a table and follow the instructions below.

Feed the pennant tip alternately up and down through the slots in the anti-tangle device.

Smooth out the pennant between each slot. When installation is complete, gently pull the pennant so that the centre seam runs straight.

- Feed the pennant tip down through slot 1 until the width of the pennant fills the slot.
- Feed the tip up through slot 3.
- Feed the tip down through slot 2.
- Feed the tip up through slot 1.
- Feed the tip down through slot 3.
- Feed the tip up through slot 5.
- Feed the tip down through slot 4.
- Feed the tip up through slot 3.
- Feed the tip down through slot 5.

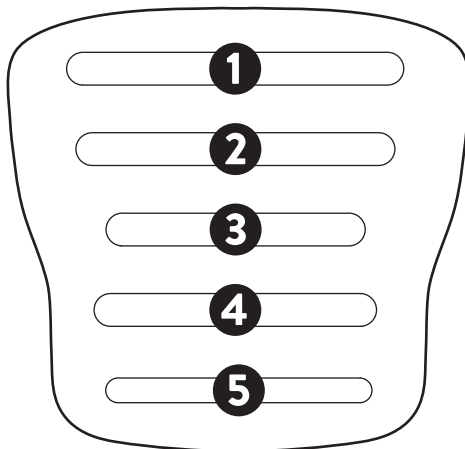

## Note

For cross pennants and larger pennants, the end of the pennant may need to be folded in order to pass sufficiently far through the first slot.

## Important

After installation, there should be 20–30 cm (8–12 inches) of free length between the bottom edge of the anti-tangle device and the tip of the pennant.

Incorrect positioning may reduce the effectiveness of the device.

## FORMENTA

Bredastensvägen 16, 331 44 Värnamo, Sweden  
+46 (0)370-69 25 50  
[www.formenta.se](http://www.formenta.se)